



DEXTER[®]
LAUNDRY



DEXTER LAUNDRY
VENDED SOLUTIONS



OUR COMPANY



OUR PRODUCTS



OUR PARTNERS



OUR PROMISE



DISCOVER THE DEXTER DIFFERENCE

Investing in laundry equipment is an investment in your future. Whether you're expanding your business or just getting started in the industry, we're here to help you achieve your dreams. As an employee-owned company our success depends on yours. We're passionate about the laundry industry and dedicated to helping customers like you build successful businesses!

Since 1894, Dexter Laundry has been dedicated to helping people and companies around the world process laundry faster and more efficiently. Our complete line of washers, dryers and management systems are designed, built, and assembled from start to finish in the USA at our Fairfield, Iowa headquarters. Our machines are engineered to withstand the harshest environments and are backed by industry-leading warranties and lifetime technical support.

Dexter Laundry products are sold and supported by authorized distributors in over 70 countries, with new distributors added each year. We stand behind every machine we build, reinvesting millions annually to improve the laundry experience globally. Through our partnership with Dexter Financial Services, we offer flexible financing solutions to help you achieve your business goals.

At Dexter, we're committed to building more than just washers and dryers—we're focused on **BUILDING BETTER LIVES TOGETHER**. Our Dexter family spans the globe, from new investors to generations-old family businesses, all working to improve their lives and communities. Laundry is a universal need, making it a smart long-term investment. We hope you'll join us!

DEXTER LAUNDRY

VENDED PRODUCT DETAILS



WASHERS PRODUCT DETAILS



DURABLE & RELIABLE

- Heavy duty bearings in a cast iron bearing housing
- Welded steel spider & shaft
- Designed to withstand 1,000 hour out-of-balance test
- Stainless steel tub, cylinder, top & front
- Industry-leading warranties
- Lifetime technical support

EFFICIENT

- Adjustable water level options
- X-Series leak detection reduces water usage and saves on expenses
- Inverter drives lower electrical usage, improve performance, and extend the life of the motor
- Available in 100G - 200G

INSTALLATION

- Adjustable final extract speeds and other customizable options allow washers to fit almost anywhere.
- Most fit through a 36" doorway.

PROFITABLE

- Simple, multi-lingual user interface
- Upsell PLUS cycles & promotion options available
- Create custom programs via DexterLive
- Easy connect to DexterPay

OPTIONS

- C-Series or X-Series
- Blue or black graphics
- Coin acceptors or payment system ready
- 20lb, 30lb, 40lb, 50lb, 60lb, 80lb, 90lb, and 120lb models available

DRYER PRODUCT DETAILS



DURABLE & RELIABLE

- Heavy duty bearings in a cast iron bearing housing
- Welded steel spider
- Tumbler baffles provide great tumbling action
- X-Series Level 1 FRS detects and controls overheating issues
- Industry-leading warranties
- Lifetime technical support

EFFICIENT

- X-Series MDS saves time and gas
- Perforated tumblers
- Balanced radial airflow
- Anti-wrinkle feature

INSTALLATION

- Vertical exhaust & venting come standard on all dryers
- Easily accessible exhaust clean outs
- Lower service door access makes lint screen cleaning easy & quick

PROFITABLE

- Simple, multi-lingual user interface
- Upsell PLUS cycles & promotion options available
- Create custom programs via DexterLive
- Easy connect to DexterPay

OPTIONS

- C-Series or X-Series
- Blue or black graphics
- Gas or electric models
- Reversing model options
- 20lb, 30lb, 50lb, 80lb, and 120lb models available

DEXTER LAUNDRY WASHERS


WHICH CONTROL IS RIGHT FOR YOU?

Dexter X-Series and C-Series washer controls differ mainly in the interface, customization options, and technology. Both controls were designed for ease of use, multilingual support, and simple integration with DexterLive and DexterPay.

X-Series washers feature a touchscreen interface that makes it easy for customers to personalize their wash while boosting owner revenue through upsell options. X-Series reduces water usage and saves on expenses with adjustable water level options and a leak detection system.

C-Series washers use a traditional button-based interface with standard programming options, focusing on simplicity and straightforward operation. PLUS cycles and temperature-based pricing are also available.

Both series’ are designed with the same Dexter quality you have come to trust while allowing you to cater to the different needs of your customer base.

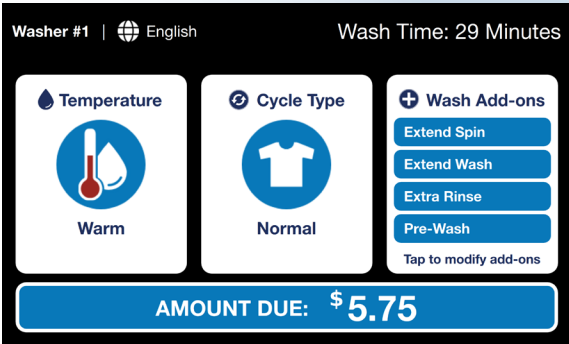

C-Series X-Series		
MODEL CONFIGURATIONS		
200G EXPRESS EXTRACT	✓	✓
WATER LEAK DETECTION	✗	✓
EMERGENCY STOP BUTTON	✓	✓
COIN BOX OPEN NOTIFICATION	✗	✓
CONTROL PROGRAMMING		
PROGRAMMABLE CYCLES	✗	✓
PROGRAMMABLE STAGES	✓	✓
CYCLE SPECIFIC WATER LEVELS	✗	✓
GENTLE TUMBLE OPTION	✗	✓
RINSE & SPIN OPTION	✗	✓
QUICK WASH OPTION	✗	✓
CLEAN TUB OPTION	✓	✓
ADJUSTABLE SPIN SPEEDS	✓	✓
DEXTERLIVE PROGRAMMING	✓	✓
CONTROL DISPLAY		
DISPLAY TYPE	SEGMENTED LED DISPLAY	FULL COLOR TOUCHSCREEN
MULTI-LINGUAL	✓	✓
ON SCREEN LANGUAGE CHANGE	✗	✓

DEXTER LAUNDRY DRYERS

WHICH CONTROL IS RIGHT FOR YOU?

The differences between Dexter X-Series and C-Series dryers primarily lie in their controls, customization capabilities, and their efficiency and utility saving features.

X-Series dryers feature intuitive user screens and include additional models with upsell reversing options. Designed for efficiency, the Moisture Detection System saves time and gas while the built-in level 1 Fire Response System enhances safety by detecting and controlling overheating issues.

C-Series dryers include a simple, multi-lingual user interface with a variety of PLUS cycle features and promotion options. C-Series controls work with DexterLive to allow you to create custom programs and work with the DexterPay mobile payment app for cashless transactions.

Both series’ are backed by industry-leading warranties & lifetime technical support so you can be confident in your investment.



C-Series X-Series		
MODEL CONFIGURATIONS		
REVERSING TUMBLERS (AVAILABILITY VARIES BY MODEL)	✓	✓
MOISTURE DETECTION SYSTEM	✗	✓
LEVEL 1 FIRE RESPONSE SYSTEM	✗	✓
COIN BOX OPEN NOTIFICATION	✗	✓
CONTROL PROGRAMMING		
PROGRAMMABLE CYCLES	✗	✓
PROGRAMMABLE STAGES	✗	✓
NO HEAT OPTION	✗	✓
EXTENDED ANTI-WRINKLE	✗	✓
DEXTERLIVE PROGRAMMING	✓	✓
ADJUSTABLE PRICING PER POCKET ON STACK DRYERS	✗	✓
CONTROL DISPLAY		
DISPLAY TYPE	SEGMENTED LED DISPLAY	FULL COLOR TOUCHSCREEN
MULTI-LINGUAL	✓	✓
ON SCREEN LANGUAGE CHANGE	✗	✓



DEXTERLIVE MANAGEMENT SYSTEM

DexterLive has transformed the laundry ownership experience by empowering owners around the world to create world-class laundry operations. This cloud-based platform simplifies store data, enabling smarter decisions that build better businesses. With real-time reporting, owners can quickly adjust pricing, cycles, and promotions to adapt to changing conditions, all while still fostering stronger customer relations through the integration of DexterPay.

One of the greatest advantages of DexterLive is that it requires no annual fees or hidden charges. Once your machines are networked, you have full access. DexterLive also provides regular updates, making even older equipment more valuable over time. With features like remote access, machine management, and automatic upgrades, DexterLive ensures that your laundry operation stays on the cutting edge, long after your initial purchase. This is transformational technology at its best!




DEXTERPAY MOBILE PAYMENT APP


DexterPay revolutionizes the customer laundry experience by seamlessly integrating with the DexterLive network, offering a simple and convenient mobile payment solution. With DexterPay, customers can easily add PLUS cycles or select specialty cycles exclusive to the app, while owners benefit from maximized revenue and streamlined operations.

More than just a payment method, DexterPay is a powerful customer management tool that offers valuable insights and supports rewards, promotions, and store credit to boost customer loyalty. Fully integrated with DexterLive, DexterPay requires no annual fees and eliminates the need for third-party payment systems.

Transform your laundry today with DexterPay, an option that satisfies both you and your customers. It's laundry made easy!

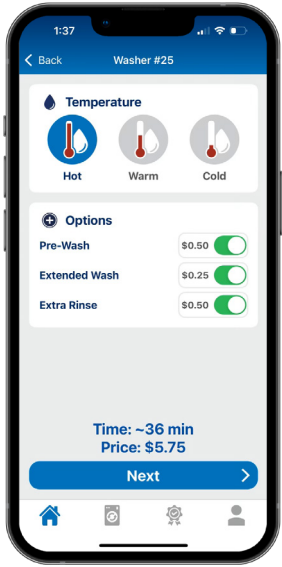

EXPRESS X-SERIES WASHERS High Extract | Energy Efficient | 10-Year Warranty



T-350
20 lb (9.1 kg)



T-450
30 lb (13.6 kg)



T-650
40 lb (18.1 kg)



T-950
60 lb (27.2 kg)



T-1450
90 lb (40.8 kg)



T-1800
120 lb (54.4 kg)

EXPRESS X-SERIES DRYERS Built to Last | Superior Performance | 5-Year Warranty



T-30x2 STACK
2 x 30 lb (2 x 13.6 kg)
Reversing Option



T-50x2 STACK
2 x 50 lb (2 x 22.7 kg)
Reversing Option



T-30 SINGLE POCKET
30 lb (13.6 kg)



T-50 SINGLE POCKET
50 lb (22.7 kg)





T-80 SINGLE POCKET
80 lb (36.3 kg)
Reversing Option




T-120 SINGLE POCKET
120 lb (54.4 kg)
Reversing

SIMPLE USER INTERFACE Easy Navigation | Multiple Languages | Customizable Cycles

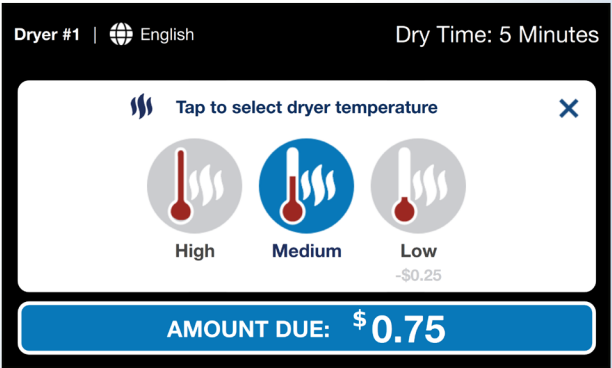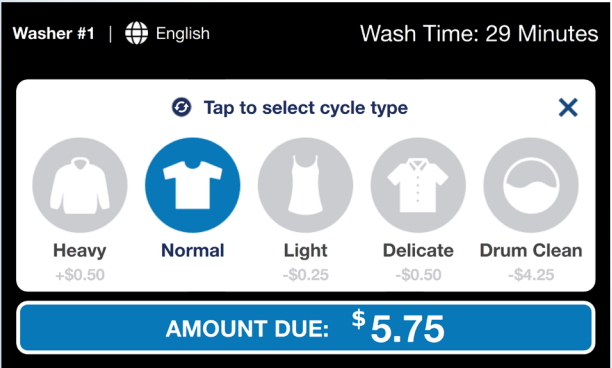

All vended products are available with blue or black graphics. For more product features and specs visit **DEXTER.COM**

C-SERIES WASHERS Built to Last | Energy Efficient | 10-Year Warranty



T-300
20 lb (9.1 kg)



T-400
30 lb (13.6 kg)



T-600
40 lb (18.1 kg)



T-900
60 lb (27.2 kg)



T-1200
80 lb (36.3 kg)



T-1800
120 lb (54.4 kg)

EXPRESS C-SERIES WASHERS High Extract | Energy Efficient | 10-Year Warranty



T-350
20 lb (9.1 kg)



T-450
30 lb (13.6 kg)



T-650
40 lb (18.1 kg)



T-750
50 lb (22.7 kg)



T-950
60 lb (27.2 kg)



T-1450
90 lb (40.8 kg)

EXPRESS C-SERIES DRYERS Built to Last | Superior Performance | 5-Year Warranty



T-20x2 STACK
2 x 20 lb (2 x 9.1 kg)



T-30x2 STACK
2 x 30 lb (2 x 13.6 kg)



T-50x2 STACK
2 x 50 lb (2 x 22.7 kg)
Reversing Option



T-30 SINGLE POCKET
30 lb (13.6 kg)



T-50 SINGLE POCKET
50 lb (22.7 kg)



T-80 SINGLE POCKET
80 lb (36.3 kg)
Reversing Option



T-120 SINGLE POCKET
120 lb (54.4 kg)
Reversing

EXPRESS C-SERIES
STACK WASHER-DRYERS



T-350 STACK WASHER-DRYER
WASHER: 20 lb (9.1 kg)
DRYER: 20 lb (9.1 kg)



T-450 STACK WASHER-DRYER
WASHER: 30 lb (13.6 kg)
DRYER: 30 lb (13.6 kg)



T-750 STACK WASHER-DRYER
WASHER: 50 lb (22.7 kg)
DRYER: 50 lb (22.7 kg)
Reversing

All vended products are available with blue or black graphics.
For more information on product features and specifications visit us at DEXTER.COM

STANDARD C-SERIES & X-SERIES WASHER SPECIFICATIONS

		T-300		T-400		T-600		T-900		T-1200		T-1800	
Control	Network Enabled	C-Series		C-Series		C-Series		C-Series		C-Series		C-Series X-Series	
Capacity	Dry Weight Capacity - lb (kg)	20	(9.1)	30	(13.6)	40	(18.1)	60	(27.2)	80	(36.3)	120	(54.4)
	Cylinder Volume - cu ft (L)	2.7	(76.5)	4	(113.3)	6	(170)	9	(254.9)	11.5	(325.6)	17.4	(492.7)
Speed	High Extract Speed - g (RPM)	100	(579)	100	(532)	100	(532)	100	(485)	100	(485)	100	(436)
	Motor Size - hp (kW)	1	(0.75)	2	(1.5)	2	(1.5)	3	(2.2)	3	(2.2)	7.8	(5.8)
Dimensions	Cabinet Height - in (cm)	43 7/8	(111.4)	48 3/16	(122.4)	49 11/16	(126.2)	55 3/8	(140.7)	57 7/8	(147)	62 3/8	(158.4)
	Cabinet Width - in (cm)	26	(66)	29 7/8	(75.9)	29 7/8	(75.9)	34 3/8	(87.3)	34 3/8	(87.3)	41 1/2	(105.4)
	Cabinet Depth - in (cm)	25	(63.5)	27 3/8	(69.5)	36	(91.4)	38 7/8	(98.8)	45 3/8	(115.3)	48 1/4	(122.6)
	Door Opening - in (cm)	12 1/4	(31.1)	15 1/4	(38.7)	15 1/4	(38.7)	19 1/4	(48.9)	19 1/4	(48.9)	19 1/4	(48.9)
	Floor to Door Bottom - in (cm)	14 7/8	(37.8)	16 1/4	(41.3)	16 1/4	(41.3)	16	(40.6)	18 1/2	(47)	19 5/16	(49.1)
	Cylinder Diameter - in (cm)	21	(53.3)	25	(63.5)	25	(63.5)	30	(76.2)	30	(76.2)	37	(94)
	Cylinder Depth - in (cm)	13 1/2	(34.3)	14 1/8	(35.9)	21 1/8	(53.7)	22	(55.9)	28	(71.1)	28	(71.1)
Weight	Net Weight - lbs (kg)	317	(143.8)	432	(196)	558	(253.1)	964	(437.3)	1022	(463.6)	1415	(641.8)
Shipping	Shipping Weight - lbs (kg)	340	(154.2)	450	(204.1)	580	(263.1)	980	(444.5)	1063	(482.2)	1460	(662.2)
	Shipping Height - in (cm)	50	(127)	53 1/4	(135.3)	54 3/4	(139.1)	61 1/2	(156.2)	63 3/4	(161.9)	69 1/4	(175.9)
	Shipping Width - in (cm)	27 1/4	(69.2)	31 1/2	(80)	31 1/2	(80)	36	(91.4)	36	(91.4)	43 1/8	(109.5)
	Shipping Depth - in (cm)	30 1/2	(77.5)	33 1/2	(85.1)	41	(104.1)	44 1/4	(112.4)	52 3/16	(132.6)	54	(137.2)
Water	Water Inlet Size - in (mm)	3/4	(19)	3/4	(19)	3/4	(19)	3/4	(19)	3/4	(19)	3/4	(19)
	Pressure (min/max) - psi (kPa)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)
	Flow Rate Per Valve Per Min - G/(L)	9	(34)	9	(34)	9	(34)	9	(34)	9 & 12	(34 & 45)	9 & 12	(34 & 45)
	Approx. Water Usage - G (L)	15.8	(59.8)	23.5	(89)	35.1	(132.9)	52.6	(199.1)	67	(253.6)	95.6	(361.9)
	Drain Diameter (O.D.) - in (cm)	2 1/4	(5.7)	3	(7.6)	3	(7.6)	3	(7.6)	3	(7.6)	3	(7.6)
	Floor to Center of Drain - in (cm)	6	(15.2)	4 11/16	(11.9)	5	(12.7)	6 5/8	(16.8)	8 5/8	(21.8)	8 5/16	(21.1)
Electrical	Model	Volts / Hz / Phase / Wiring		Circuit Breaker / Running Amps / Wire Size									
	-10	120 / 60 / 1 / 2 wire + ground		20 / 13 / #12	---	---	---	---	---	---	---		
	-12	208-240 / 60 / 1 / 2 wire + ground		15 / 4 / #12	15 / 6.2 / #12	15 / 6.2 / #12	20 / 8.4 / #12	20 / 8.4 / #12	30 / 16.6 / #10				
		208-240 / 60 / 3 / 3 wire + ground											
	-39	230 / 50 / 1 / 2 wire + ground		15 / 4 / 3.5 mm²	15 / 6.2 / 3.5 mm²	15 / 6.2 / 3.5 mm²	20 / 8.4 / 3.5 mm²	20 / 8.4 / 3.5 mm²	30 / 16.6 / 5.3 mm²				
	-59	230 / 50 / 1 / 2 wire + ground		15 / 4 / 3.5 mm²	15 / 6.2 / 3.5 mm²	15 / 6.2 / 3.5 mm²	20 / 8.4 / 3.5 mm²	---	---				
Installation	Min. Behind Machines - in (cm)	24	(61)	24	(61)	24	(61)	24	(61)	24	(61)	24	(61)
	Min. Concrete Thickness - in (cm)	6	(15.2)	6	(15.2)	6	(15.2)	8	(20.3)	8	(20.3)	12	(30.5)

Due to continuous product improvements specifications are subject to change, please consult the installation manual for the most accurate information.
*Agency approvals vary based on machine configuration. Major approval bodies include ETL, CE and AGA. Dexter Laundry is ISO 9001:2015 certified by Intertek.

EXPRESS C-SERIES & X-SERIES WASHER SPECIFICATIONS

		T-350		T-450		T-650		T-750		T-950		T-1450		
Control	Network Enabled		C-Series X-Series		C-Series X-Series		C-Series X-Series		C-Series		C-Series X-Series		C-Series X-Series	
Capacity	Dry Weight Capacity - lb (kg)		20	(9.1)	30	(13.6)	40	(18.1)	50	(22.7)	60	(27.2)	90	(40.8)
	Cylinder Volume - cu ft (L)		2.7	(76.5)	3.8	(107.6)	6	(170)	6.5	(184.1)	9	(254.9)	13.7	(388)
Speed	High Extract Speed - g (RPM)		200	(819)	200	(750)	200	(750)	200	(685)	200	(685)	200	(617)
	Motor Size - hp (kW)		1	(0.75)	2	(1.5)	2	(1.5)	3	(2.2)	3	(2.2)	6.7	(5)
Dimensions	Cabinet Height - in (cm)		43 7/8	(111.4)	48 3/16	(122.4)	53	(134.6)	55 3/8	(140.7)	55 3/8	(140.7)	62 3/8	(158.4)
	Cabinet Width - in (cm)		26	(66)	29 7/8	(75.9)	29 7/8	(75.9)	34 3/8	(87.3)	34 3/8	(87.3)	41 1/2	(105.4)
	Cabinet Depth - in (cm)		28	(71.1)	28 1/4	(71.8)	38 1/8	(96.8)	32 7/8	(83.5)	38 7/8	(98.7)	42 1/4	(107.3)
	Door Opening - in (cm)		12 1/4	(31.1)	15 1/4	(38.7)	15 1/4	(38.7)	19 1/4	(48.9)	19 1/4	(48.9)	19 1/4	(48.9)
	Floor to Door Bottom - in (cm)		14 7/8	(37.8)	16 1/4	(41.3)	16 1/4	(41.3)	16	(40.6)	16	(40.6)	19 5/16	(49.1)
	Cylinder Diameter - in (cm)		21	(53.3)	25	(63.5)	25	(63.5)	30	(76.2)	30	(76.2)	37	(94)
	Cylinder Depth - in (cm)		13 1/2	(34.3)	13 3/8	(34)	21 1/8	(53.7)	16	(40.6)	22	(55.9)	22	(55.9)
Weight	Net Weight - lbs (kg)		383	(173.7)	526	(238.6)	744	(337.5)	925	(419.6)	1000	(453.6)	1322	(599.6)
Shipping	Shipping Weight - lbs (kg)		407	(184.6)	544	(246.8)	766	(347.5)	952	(431.8)	1016	(460.8)	1364	(618.7)
	Shipping Height - in (cm)		49 1/4	(125.1)	53 1/4	(135.3)	58 3/4	(149.2)	61 1/2	(156.2)	61 1/2	(156.2)	69 1/4	(175.9)
	Shipping Width - in (cm)		28 1/4	(71.8)	31 1/2	(80)	31 1/2	(80)	36	(91.4)	36	(91.4)	43 1/8	(109.5)
	Shipping Depth - in (cm)		33 1/2	(85.1)	33 1/2	(85.1)	43 3/4	(111.1)	38	(96.5)	45 1/4	(114.9)	48	(121.9)
Water	Water Inlet Size - in (mm)		3/4	(19)	3/4	(19)	3/4	(19)	3/4	(19)	3/4	(19)	3/4	(19)
	Pressure (min/max) - psi (kPa)		30-120	(207-827)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)
	Flow Rate Per Valve Per Min - G/(L)		9	(34)	9	(34)	9	(34)	9	(34)	9 & 12	(34 & 45)	9 & 12	(34 & 45)
	Approx. Water Usage - gal (L)		15.8	(59.8)	22.2	(84)	35.1	(132.9)	38.4	(145.4)	52.6	(199.1)	80.1	(303.2)
	Drain Diameter (O.D.) - in (cm)		2 1/4	(5.7)	3	(7.6)	3	(7.6)	3	(7.6)	3	(7.6)	3	(7.6)
	Floor to Center of Drain - in (cm)		6	(15.2)	5	(12.7)	6 7/8	(17.5)	6 5/8	(16.8)	6 5/8	(16.8)	8 5/16	(21.1)
Electrical	Model	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size											
	-12	208-240 / 60 / 1 / 2 wire + ground	15 / 6.2 / #12	15 / 6.2 / #12	15 / 6.2 / #12	20 / 8.4 / #12	20 / 12 / #12	30 / 15 / #10						
		208-240 / 60 / 3 / 3 wire + ground												
	-39	230 / 50 / 1 / 2 wire + ground	15 / 6.2 / 3.5 mm²	15 / 6.2 / 3.5 mm²	15 / 6.2 / 3.5 mm²	20 / 8.4 / 3.5 mm²	20 / 12 / 3.5 mm²	30 / 15 / 5.3 mm²						
	-59	230 / 50 / 1 / 2 wire + ground	15 / 6.2 / 3.5 mm² (C-Series)	15 / 6.2 / 3.5 mm² (C-Series)	15 / 6.2 / 3.5 mm² (C-Series)	20 / 8.4 / 3.5 mm² (C-Series)	---	---						
Installation	Min. Behind Machines - in (cm)		24	(61)	24	(61)	24	(61)	24	(61)	24	(61)	24	(61)
	Min. Concrete Thickness - in (cm)		6	(15.2)	6	(15.2)	8	(20.3)	8	(20.3)	8	(20.3)	12	(30.5)

Due to continuous product improvements specifications are subject to change, please consult the installation manual for the most accurate information.
*Agency approvals vary based on machine configuration. Major approval bodies include ETL, CE and AGA. Dexter Laundry is ISO 9001:2015 certified by Intertek.

Control	T-30		T-50	
	Network Enabled	C-Series X-Series	C-Series X-Series	
Capacity	Dry Weight Capacity - lb (kg)	30 (13.6)	50 (22.7)	
	Cylinder Volume - cu ft (L)	11.3 (320)	15.8 (447.4)	
Speed	Motor Size - 60 Hz Model - hp (kW)	0.5 (0.38)	1 (0.75)	
	Motor Size - 50 Hz Model - hp (kW)	0.5 (0.38)	0.75 (0.56)	
Airflow	60 Hz Model - cfm (M3/min)	830 (23.5)	910 (25.8)	
	50 Hz Model - cfm (M3/min)	690 (19.5)	760 (21.5)	
Dimensions	Cabinet Height - in (cm)	72 1/4 (183.5)	72 1/4 (183.5)	
	Cabinet Width - in (cm)	31 1/2 (80)	34 1/2 (87.6)	
	Cabinet Depth - in (cm)	41 3/4 (106)	48 (121.9)	
	Door Opening - in (cm)	22 5/8 (57.5)	25 5/8 (65.1)	
	Floor to Door Bottom - in (cm)	28 3/4 (73)	27 1/4 (69.2)	
	Cylinder Diameter - in (cm)	30 (76.2)	32 1/2 (82.6)	
	Cylinder Depth - in (cm)	27 1/2 (69.9)	33 (83.8)	
	Lint Screen Area - sq in (sq cm)	515 (3323)	708 (4568)	
	Net Weight - lbs (kg)	454 (205.9)	540 (244.9)	
Shipping	Shipping Weight - lbs (kg)	499 (226.3)	590 (267.6)	
	Shipping Height - in (cm)	77 1/4 (196.2)	77 1/4 (196.2)	
	Shipping Width - in (cm)	32 3/4 (83.2)	36 (91.4)	
	Shipping Depth - in (cm)	45 1/2 (115.6)	51 1/2 (130.8)	
Gas (Gas Models Only)	Gas Supply Connection - in (mm)	1/2 (12.7)	1/2 (12.7)	
	Natural Gas Supply (Water Column) - in (cm)	5-8 (12.7-20.3)	5-8 (12.7-20.3)	
	LP Gas Supply (Water Column) - in (cm)	11 1/2-13 1/2 (29.2-34.3)	11 1/2-13 1/2 (29.2-34.3)	
	Gas Usage - 60Hz Model - BTU/hr (kW)	90,000 (26.4)	145,000 (42.5)	
	Gas Usage - 50Hz Model - BTU/hr (kW)	74,000 (21.7)	120,000 (35.2)	
Electrical	Gas Models	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability	
	-10	120 / 60 / 1 / 2 wire + ground	15 / 9.6 / #12 / Non-Reversing (C-Series)	15 / 9.6 / #12 / Non-Reversing (C-Series)
	-15	208-240 / 60 / 1 / 2 wire + ground	15 / 5.1 / #12 / Non-Reversing (X-Series)	15 / 5.1 / #12 / Non-Reversing (X-Series)
		120 / 60 / 1 / 2 wire + ground	15 / 9.6 / #12 / Non-Reversing (X-Series)	15 / 9.6 / #12 / Non-Reversing (X-Series)
	-39	230 / 50 / 1 / 2 wire + ground	10 / 5.1 / 2.1 mm² / Non-Reversing	10 / 5.1 / 2.1 mm² / Non-Reversing
	-59	230 / 50 / 1 / 2 wire + ground	10 / 5.1 / 2.1 mm² / Non-Reversing (C-Series)	10 / 5.1 / 2.1 mm² / Non-Reversing (C-Series)
	Electric Models	kW / Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability	
	-79	24 / 400 / 50 / 3 / 4 wire + ground	50 / 45 / 13.3 mm² / Non-Reversing (C-Series)	50 / 45 / 13.3 mm² / Non-Reversing (C-Series)
Installation	Minimum Behind Machines - in (cm)	18 (45.7)	18 (45.7)	
	Make-Up Air Required - sq ft (sq cm)	1 (929)	1.25 (1161)	
	Exhaust Size - in (cm)	8 (20.3)	8 (20.3)	
	Max. Exhaust Back Pressure (Water Column) - in (mm)	0.3 (7.6)	0.3 (7.6)	
	Recommended Exhaust Length - ft (m) & 2 elbows	14 (4.3)	14 (4.3)	


Control	T-80		T-120	
	Network Enabled	C-Series X-Series	C-Series X-Series	
Capacity	Dry Weight Capacity - lb (kg)	80 (36.3)	120 (54.4)	
	Cylinder Volume - cu ft (L)	23 (651.3)	36.1 (1022.2)	
Speed	Motor Size - Non-Reversing - 60 Hz : 50 Hz - hp (kW)	1 : 0.75 (0.75 : 0.56)	---	---
	Motor Size - Reversing - 60 Hz : 50 Hz - hp (kW)	1 & 0.75 : --- (0.75 & 0.56 : ---)	1 & 1 : 1 & 0.75 (0.75 & 0.75 : 0.75 & 0.56)	
Airflow	Airflow 8” Outlet - 60 Hz : 50 Hz - cfm (M3/min)	1200 : 1000 (34 : 28.3)	---	---
	Airflow 10” Outlet - 60 Hz & 50 Hz - cfm (M3/min)	---	1250 : 1000 (35.4 : 28.3)	
	Airflow 12” Outlet - 60 Hz & 50 Hz - cfm (M3/min)	---	1450 : 1000 (41.1 : 28.3)	
Dimensions & Weight	Cabinet Height - in (cm)	75 3/4 (192.4)	85 5/16 (216.7)	
	Cabinet Width - in (cm)	38 1/2 (97.8)	46 3/4 (188.7)	
	Cabinet Depth - in (cm)	51 3/4 (131.4)	60 3/16 (152.9)	
	Door Opening - in (cm)	25 5/8 (65.1)	30 (76.2)	
	Floor to Door Bottom - in (cm)	29 1/4 (74.3)	34 (86.4)	
	Cylinder Diameter - in (cm)	36 1/2 (92.7)	43 (109.2)	
	Cylinder Depth - in (cm)	38 (96.5)	43 (109.2)	
	Lint Screen Area - sq in (sq cm)	823 (5310)	862 (5561)	
	Net Weight - lbs (kg)	715 (324.3)	1075 (487.6)	
Shipping	Shipping Weight - lb (kg)	770 (349.3)	1122 (508.9)	
	Shipping Height - in (cm)	80 3/4 (205.1)	88 3/8 (224.5)	
	Shipping Width - in (cm)	40 1/4 (102.2)	48 1/4 (122.6)	
	Shipping Depth - in (cm)	55 1/2 (141)	68 1/2 (174)	
Gas	Gas Supply Connection - in (mm)	3/4 (19.1)	3/4 (19.1)	
	Natural Gas Supply (Water Column) - in (cm)	5-8 (12.7-20.3)	5-8 (12.7-20.3)	
	LP Gas Supply (Water Column) - in (cm)	11 1/2-13 1/2 (29.2-34.3)	11 1/2-13 1/2 (29.2-34.3)	
	Gas Usage - 60Hz : 50 Hz - BTU/hr (kW)	215,000 : 195,000 (63 : 57.1)	320,000 : 300,000 (93.8 : 87.9)	
Electrical	Gas Models	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability	
	-10	120 / 60 / 1 / 2 wire + ground	15 / 10.4 / #12 / Rev & Non-Rev	25 / 15 / #12 / Reversing
	-15	208-240 / 60 / 1 / 2 wire + ground	15 / 5.5 / #12 / Non-Reversing (X-Series)	---
		120 / 60 / 1 / 2 wire + ground	15 / 10.4 / #12 / Non-Reversing (X-Series)	---
	-39	230 / 50 / 1 / 2 wire + ground	10 / 5.2 / 2.1 mm² / Rev & Non-Rev	20 / 10 / 3.5 mm² / Reversing
	-59	230 / 50 / 1 / 2 wire + ground	10 / 5.2 / 2.1 mm² / Non-Reversing (C-Series)	---
	Electric Models	kW / Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability	
	-79	24 / 400 / 50 / 3 / 4 wire + ground	50 / 45 / 13.3 mm² / Non-Reversing (C-Series)	---
Installation	Minimum Behind Machines - in (cm)	18 (45.7)	18 (45.7)	
	Make-Up Air Required - sq ft (sq cm)	1.5 (1394)	2.25 (2090)	
	Exhaust Size - in (cm)	8 (20.3)	10 or 12 (25.4 or 30.5)	
	Max. Exhaust Back Pressure (Water Column) - in (mm)	0.3 (7.6)	0.3 (7.6)	
	Recommended Exhaust Length - ft (m) & 2 elbows	14 (4.3)	14 (4.3)	

EXPRESS C-SERIES & X-SERIES STACK DRYER SPECIFICATIONS

		T-20x2		T-30x2		T-50x2	
Control	Network Enabled	C-Series		C-Series X-Series		C-Series X-Series	
Capacity	Dry Weight Capacity - lb (kg)	2 x 20	(2 x 9.1)	2 x 30	(2 x 13.6)	2 x 50	(2 x 22.7)
	Cylinder Volume (per tumbler) - cu ft (L)	7	(198.2)	11.3	(320)	15.8	(447.4)
Speed	Motor Size (per tumbler) - Standard - hp (kW)	0.3	(0.25)	0.5	(0.38)	0.75	(0.56)
	Motor Size (per tumbler) - Reversing - hp (kW)	---	---	---	---	2 & 0.5	(1.5 & 0.38)
Airflow	60 Hz Model (per tumbler) - cfm (M3/min)	370	(10.5)	600	(17)	650	(18.4)
	50 Hz Model (per tumbler) - cfm (M3/min)	300	(8.5)	500	(14.2)	510	(14.4)
Dimensions	Cabinet Height - in (cm)	68 1/2	(174)	76 1/4	(193.7)	79 1/4	(201.3)
	Cabinet Width - in (cm)	27	(68.6)	31 1/2	(80)	34 1/2	(87.6)
	Cabinet Depth - in (cm)	44 5/8	(113.3)	49 1/2	(125.7)	54 3/4	(139.1)
	Door Opening - in (cm)	18 1/8	(46)	22 5/8	(57.5)	25 5/8	(65.1)
	Floor to Lower Door Bottom - in (cm)	8 1/2	(21.6)	7 5/8	(19.4)	7	(17.8)
	Floor to Upper Door Bottom - in (cm)	42	(106.7)	45 1/4	(114.9)	46	(116.8)
	Cylinder Diameter - in (cm)	25 1/2	(64.8)	30	(76.2)	32 1/2	(82.6)
	Cylinder Depth - in (cm)	24	(61)	27 1/2	(69.9)	33	(83.8)
	Lint Screen Area (per tumbler) - sq in (sq cm)	285	(1839)	453	(2923)	544	(3510)
	Net Weight - lbs (kg)	615	(279)	719	(326.1)	871	(395.1)
Shipping	Shipping Weight - lbs (kg)	650	(295)	765	(347)	922	(418.2)
	Shipping Height - in (cm)	74	(188)	81 1/4	(206.4)	84 1/4	(214)
	Shipping Width - in (cm)	31.5	(80)	33	(83.8)	36	(91.4)
	Shipping Depth - in (cm)	49	(124.5)	53 3/4	(136.5)	61 1/2	(156.2)
Gas (Gas Models Only)	Gas Supply Connection - in (mm)	1/2	(12.7)	1/2	(12.7)	1/2	(12.7)
	Natural Gas Supply (Water Column) - in (cm)	5-8	(12.7- 20.3)	5-8	(12.7 - 20.3)	5-8	(12.7-20.3)
	LP Gas Supply (Water Column) - in (cm)	11 1/2-13 1/2	(29.2- 34.3)	11 1/2-13 1/2	(29.2 - 34.3)	11 1/2-13 1/2	(29.2-34.3)
	Gas Usage - 60Hz Model (per tumbler) - BTU/hr (kW)	56,000	(16.4)	90,000	(26.4)	108,000	(31.7)
	Gas Usage - 50Hz Model (per tumbler) - BTU/hr (kW)	47,000	(13.8)	74,000	(21.7)	96,500	(28.3)
Electrical	Gas Models (per stack dryer)	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability				
	-11	208-240 / 60 / 1 / 2 wire + ground	---	15 / 10 / #12 / Reversing (X-Series)		20 / 15 / #12 / Reversing	
	-15	208-240 / 60 / 1 / 2 wire + ground	15 / 3.8 / #12 / Non-Reversing	15 / 5 / #12 / Non-Reversing		20 / 10 / #12 / Non-Reversing	
		120 / 60 / 1 / 2 wire + ground	15 / 7.8 / #12 / Non-Reversing	20 / 8 / #12 / Non-Reversing		30 / 20 / #10 / Non-Reversing	
	-39	230 / 50 / 1 / 2 wire + ground	15 / 6.6 / 3.5 mm² / Non-Reversing	15 / 10 / 3.5 mm² / Rev & Non-Rev		20 / 15 / 3.5 mm² / Rev & Non-Rev (X-Series)	
	-49	240 / 50 / 1 / 2 wire + ground	---	---	20 / 15 / 3.5 mm² / Rev (C-Series)		
					20 / 10 / 3.5 mm² / Non-Rev (C-Series)		
	-59	230 / 50 / 1 / 2 wire + ground	---	15 / 10 / 3.5 mm² / Non-Rev (C-Series)		20 / 10 / 3.5 mm² / Non-Rev (C-Series)	
	Electric Models	kW / Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability				
	-79	24 / 400 / 50 / 3 / 4 wire + ground	---	50 / 45 / 13.3 mm² / Non-Rev (C-Series)		---	
-82	15 / 400 / 50 / 3 / 4 wire + ground	30 / 30 / 8.5 mm² / Non-Reversing	---		---		
Installation	Min. Clearance Behind Machines - in (cm)	18	(45.7)	18	(45.7)	18	(45.7)
	Make-Up Air Required (per stack dryer) - sq ft (sq cm)	1	(929)	1.5	(1394)	1.5	(1394)
	Exhaust Size - in (cm)	8	(20.3)	8	(20.3)	8	(20.3)
	Max. Exhaust Back Pressure (Water Column) - in (mm)	0.3	(7.6)	0.3	(7.6)	0.3	(7.6)
	Recommended Exhaust Length - ft (m) & 2 elbows	14	(4.3)	14	(4.3)	14	(4.3)

EXPRESS C-SERIES STACK WASHER-DRYER SPECIFICATIONS

			T-350 SWD		T-450 SWD		T-750 SWD			
Control	Network Enabled		C-Series		C-Series		C-Series			
Capacity	Dry Weight Capacity (per machine) - lb (kg)		20	(9.1)	30	(13.6)	50	(22.7)		
	Cylinder Volume - Washer : Dryer - cu ft (L)		2.7 : 7	(76.5 : 198.2)	4 : 11.3	(113.3 : 320)	6.5 : 15.8	(184.1 : 447.4)		
Speed & Airflow	Washer Extract Speed - High : Interm. : Wash - g (RPM)		200 : 60 : 0.9	(819 : 449 : 55)	200 : 60 : 0.9	(750 : 411 : 50)	200 : 60 : 0.9	(685 : 375 : 43)		
	Motor Size - Washer : Dryer - hp (kW)		1 : 0.3	(0.75 : 0.25)	2 : 0.5	(1.5 : 0.38)	3 : 2 & 0.5	(2.2 : 1.5 & 0.38)		
	Airflow - 60 Hz : 50 Hz - cfm (M3/min)		370 : 300	(10.5 : 8.5)	500 : 450	(14.6 : 12.7)	650 : 510	(18.4 : 14.4)		
Dimensions	Overall - Height : Width : Depth - in (cm)		74 ¾ : 27 : 44 ⅝	(189.9 : 68.6 : 113.7)	78 ⅝ : 31 ½ : 49 7/16	(199 : 80 : 125.6)	87 ¾/16 : 34 ½ : 54 ⅝	(221.5 : 87.6 : 138.7)		
	Shipping - Height : Width : Depth - in (cm)		80 ⅝ : 29 ¼ : 49 ¾	(204.8 : 74.3 : 126.4)	84 : 34 : 54	(213.4 : 86.4 : 137.2)	91 ⅝ : 35 7/8 : 63 ½	(232.7 : 91.1 : 161.3)		
	Weight - Net : Shipping - lb (kg)		800 : 840	(362.9 : 381)	1051 : 1101	(476.7 : 499.4)	1600 : 1650	(725.7 : 748.4)		
	Washer Cylinder - Diameter : Depth - in (cm)		21 : 13 ½	(53.3 : 34.3)	25 : 14 ⅞	(63.5 : 35.9)	30 : 16	(76.2 : 40.6)		
	Dryer Cylinder - Diameter : Depth - in (cm)		25 ½ : 24	(64.8 : 61)	30 : 27 ½	(76.2 : 69.9)	32 ½ : 33	(82.5 : 83.8)		
	Door Opening - Washer : Dryer- in (cm)		12 ¼ : 18 ⅞	(31.1 : 46)	15 ¼ : 22 11/16	(38.7 : 57.6)	19 ¼ : 25 ⅝	(48.9 : 65.1)		
	Floor to Door Bottom - Washer : Dryer - in (cm)		14 7/8 : 48 ¼	(37.8 : 122.6)	12 7/16 : 47 ⅜	(31.6 : 120.3)	16 : 55 ⅞	(40.6 : 140)		
	Dryer Lint Screen Area - sq in (sq cm)		285	(1839)	453	(2923)	544	(3510)		
Installation	Min. Clearance - Between : Behind - in (cm)		½ : 24	(1.3 : 61)	½ : 24	(1.3 : 61)	½ : 24	(1.3 : 61)		
	Min. Concrete Thickness - in (cm)		6	(15.2)	6	(15.2)	8	(20.3)		
	Make-Up Air Required - sq ft (sq cm)		0.7	(650)	1	(929)	1	(929)		
	Exhaust Size - in (cm)		6	(15.2)	6	(15.2)	8	(20.3)		
	Max. Exhaust Back Pressure (Water Column) - in (mm)		0.3	(7.6)	0.3	(7.6)	0.3	(7.6)		
	Recommended Exhaust Length - ft (m) & 2 elbows		14	(4.3)	14	(4.3)	14	(4.3)		
Water	Water Inlet Size - in (mm)		¾	(19)	¾	(19)	¾	(19)		
	Pressure (min-max) - psi (kPa)		30-120	(207-827)	30-120	(207-827)	30-120	(207-827)		
	Flow Rate Per Valve Per Min G/(L)		9	(34)	9	(34)	9	(34)		
	Approx. Water Usage - gal (L)		15.8	(59.8)	23.5	(89)	38.4	(145.4)		
	Drain Diameter (O.D.) - in (cm)		2 ¼	(5.7)	3	(7.6)	3	(7.6)		
	Floor to Center of Drain - in (cm)		5 7/8	(14.9)	4 7/16	(11.3)	6 ⅝	(16.8)		
Gas	Gas Supply Connection - in (mm)		½	(12.7)	½	(12.7)	½	(12.7)		
	Natural Gas Supply (Water Column) - in (cm)		5-8	(12.7-20.3)	5-8	(12.7-20.3)	5-8	(12.7-20.3)		
	LP Gas Supply (Water Column) - in (cm)		11 1/2-13 1/2	(29.2-34.3)	11 1/2-13 1/2	(29.2-34.3)	11 1/2-13 1/2	(29.2-34.3)		
	Gas Usage - 60 Hz : 50 Hz - BTU/hr (kW)		56,000 : 47,000	(16.4 : 13.8)	80,000 : 74,000	(23.4 : 21.7)	108,000 : 96,000	(31.7 : 28.3)		
Electrical	Model		Volts / Hz / Phase / Wiring		Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability					
	-16	Washer	208-240 / 60 / 1 / 2 wire + ground		---		---		20 / 8.4 / #12	
			208-240 / 60 / 3 / 3 wire + ground							
		Gas Dryer	208-240 / 60 / 1 / 2 wire + ground		---		15 / 10 / #12 / Reversing			
	-17	Washer	208-240 / 60 / 1 / 2 wire + ground						15 / 6.2 / #12	
			208-240 / 60 / 3 / 3 wire + ground							
		Gas Dryer	120 / 60 / 1 / 2 wire + ground		15 / 3.9 / #12 / Non-Reversing		15 / 4 / #12 / Non-Reversing		---	
			208-240 / 60 / 1 / 2 wire + ground		15 / 1.9 / #12 / Non-Reversing		15 / 2.5 / #12 / Non-Reversing		---	
	-39	Washer	230 / 50 / 1 / 2 wire + ground		15 / 6.2 / 3.5 mm²		15 / 6.5 / 3.5 mm²		20 / 8.4 / 3.5 mm²	
		Gas Dryer	230 / 50 / 1 / 2 wire + ground		15 / 3.4 / 3.5 mm² / Non-Reversing		15 / 5 / 3.5 mm² / Non-Reversing		15 / 10 / 3.5 mm² / Reversing	
	-59	Washer	230 / 50 / 1 / 2 wire + ground		---		15 / 6.5 / 3.5 mm²		---	
		Gas Dryer	230 / 50 / 1 / 2 wire + ground		---		15 / 5 / 3.5 mm² / Non-Reversing		---	
	-79	Washer	230 / 50 / 1 / 2 wire + ground		---		15 / 6.5 / 3.5 mm²		---	
		24 kW Electric Dryer	400 / 50 / 3 / 4 wire + ground		---		50 / 45 / 13.3 mm² / Non-Reversing		---	
	-82	Washer	230 / 50 / 1 / 2 wire + ground		15 / 6.2 / 3.5 mm²		---		---	
		15 kW Electric Dryer	400 / 50 / 3 / 4 wire + ground		30 / 30 / 8.5 mm² / Non-Reversing		---		---	



DEXTER[®]
LAUNDRY

DEXTER.COM | 1.800.524.2954

EMPLOYEE OWNED | MADE IN THE USA | SINCE 1894