

SOMEDAY... IS **NOW!**



X SERIES



DEXTER[®]
LAUNDRY

X SERIES




THE **EXTRA OPTIONS AND CONTROL** CUSTOMERS WANT,
THE **EXTRA REVENUE AND SAVINGS** OWNERS NEED.



DEXTER LAUNDRY X-SERIES WASHERS

Dexter X-Series washers are designed to deliver exceptional performance while enhancing both the customer and laundry ownership experience. With large, intuitive user screens and a multi-lingual interface, they are easy for anyone to navigate. Customizable cycles, including gentle tumble, rinse and spin, quick wash, and clean tub options, allow customers to personalize their wash while boosting owners revenue through upsell options.

X-Series washers feature 200 g-force extraction for powerful, efficient cleaning and a water leak detection system for utility savings. Seamless integration with DexterPay provides cashless transactions while DexterLive simplifies the store management experience. Made in the USA and backed by a 10-year warranty, X-Series washers are a smart, long-term investment for any laundry business.

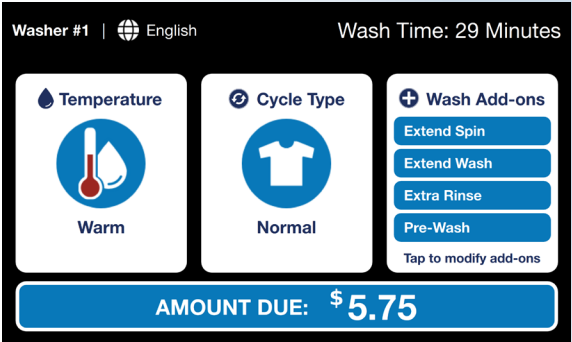

	C-Series	X-Series
MODEL CONFIGURATIONS		
200G EXPRESS EXTRACT	✓	✓
WATER LEAK DETECTION	✗	✓
EMERGENCY STOP BUTTON	✓	✓
COIN BOX OPEN NOTIFICATION	✗	✓
CONTROL PROGRAMMING		
PROGRAMMABLE CYCLES	✗	✓
PROGRAMMABLE STAGES	✓	✓
CYCLE SPECIFIC WATER LEVELS	✗	✓
GENTLE TUMBLE OPTION	✗	✓
RINSE & SPIN OPTION	✗	✓
QUICK WASH OPTION	✗	✓
CLEAN TUB OPTION	✓	✓
ADJUSTABLE SPIN SPEEDS	✓	✓
DEXTERLIVE PROGRAMMING	✓	✓
CONTROL DISPLAY		
DISPLAY TYPE	SEGMENTED LED DISPLAY	FULL COLOR TOUCHSCREEN
MULTI-LINGUAL	✓	✓
ON SCREEN LANGUAGE CHANGE	✗	✓

DEXTER LAUNDRY

X-SERIES DRYERS

Dexter X-Series dryers are built for optimal performance and ease of use, featuring intuitive user screens and multi-lingual support for accessibility. Select X-Series dryers come standard with upsell reversing options that boost revenue and reduce dry time with a detangling feature. Additionally, no heat cycle options are now available for delicate articles of clothing.

Engineered for efficiency, the Moisture Detection System will automatically stop once the load is dry, helping to increase throughput, and save up to 13% dry-time per week.* The built-in Level 1 Fire Response System enhances safety by detecting and controlling overheating issues. Proudly made in the USA and backed by a 5-year warranty and live lifetime technical support, X-Series dryers deliver the reliable Dexter quality you trust.



C-Series X-Series		
MODEL CONFIGURATIONS		
REVERSING TUMBLERS (AVAILABILITY VARIES BY MODEL)	✓	✓
MOISTURE DETECTION SYSTEM	✗	✓
LEVEL 1 FIRE RESPONSE SYSTEM	✗	✓
COIN BOX OPEN NOTIFICATION	✗	✓
CONTROL PROGRAMMING		
PROGRAMMABLE CYCLES	✗	✓
PROGRAMMABLE STAGES	✗	✓
NO HEAT OPTION	✗	✓
EXTENDED ANTI-WRINKLE	✗	✓
DEXTERLIVE PROGRAMMING	✓	✓
ADJUSTABLE PRICING PER POCKET ON STACK DRYERS	✗	✓
CONTROL DISPLAY		
DISPLAY TYPE	SEGMENTED LED DISPLAY	FULL COLOR TOUCHSCREEN
MULTI-LINGUAL	✓	✓
ON SCREEN LANGUAGE CHANGE	✗	✓

*MDS results based off of a free dry vend, paid dry situations will continue to tumble at low heat until the load is complete.



DEXTER X-SERIES INDUSTRY-LEADING WARRANTIES

5 YEARS
ON ALL DRYERS

All X-Series dryer components are covered under a 5-year warranty.

10 YEARS
ON ALL WASHERS

All X-Series washers are covered by a 10-year parts warranty on the frame, tub, cyclinder, shaft, seals, bearings, and bearing housings.

A 5-year warranty covers the rest.



THE SAME DEXTER QUALITY, WITH AN **EXTRA TOUCH.**



EXPRESS X-SERIES WASHERS

High Extract | Energy Efficient | 10-Year Warranty



T-350
20 lb (9.1 kg)



T-450
30 lb (13.6 kg)



T-650
40 lb (18.1 kg)



T-950
60 lb (27.2 kg)



T-1450
90 lb (40.8 kg)



T-1800
120 lb (54.4 kg)

EXPRESS X-SERIES DRYERS

Built to Last | Superior Performance | 5-Year Warranty



T-30x2 STACK
2 x 30 lb (2 x 13.6 kg)
Reversing Option



T-50x2 STACK
2 x 50 lb (2 x 22.7 kg)
Reversing Option



T-30 SINGLE POCKET
30 lb (13.6 kg)



T-50 SINGLE POCKET
50 lb (22.7 kg)



T-80 SINGLE POCKET
80 lb (36.3 kg)
Reversing Option





T-120 SINGLE POCKET
120 lb (54.4 kg)
Reversing

X SERIES

SIMPLE USER INTERFACE

Easy Navigation | Multiple Languages | Customizable Cycles

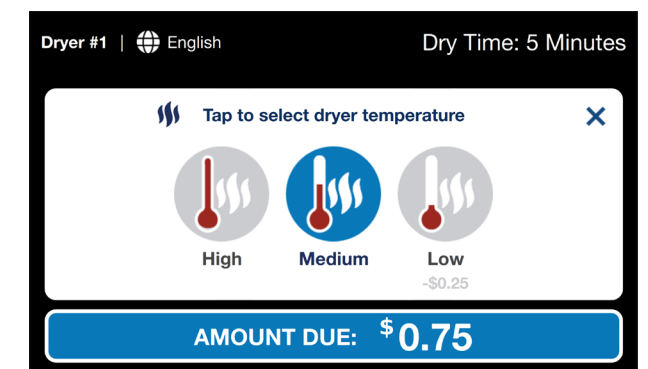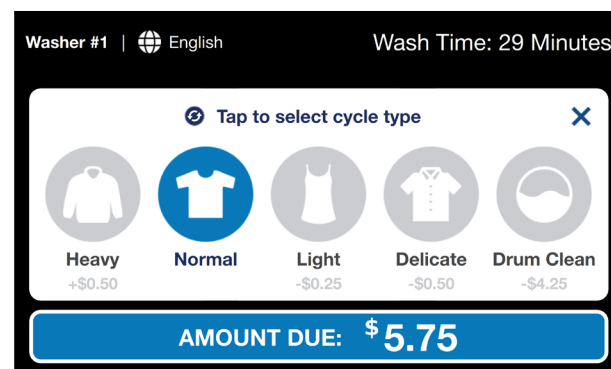

All vended products are available with blue or black graphics. For more product features and specs visit **DEXTER.COM**

EXPRESS X-SERIES WASHER SPECIFICATIONS

		T-350		T-450		T-650		T-950		T-1450		T-1800		
Control	Network Enabled		C-Series X-Series		C-Series X-Series		C-Series X-Series		C-Series X-Series		C-Series X-Series		C-Series X-Series	
Capacity	Dry Weight Capacity - lb (kg)		20	(9.1)	30	(13.6)	40	(18.1)	60	(27.2)	90	(40.8)	120	(54.4)
	Cylinder Volume - cu ft (L)		2.7	(76.5)	3.8	(107.6)	6	(170)	9	(254.9)	13.7	(388)	17.4	(492.7)
Speed	High Extract Speed - g (RPM)		200	(819)	200	(750)	200	(750)	200	(685)	200	(617)	100	(436)
	Motor Size - hp (kW)		1	(0.75)	2	(1.5)	2	(1.5)	3	(2.2)	6.7	(5)	7.8	(5.8)
Dimensions	Cabinet Height - in (cm)		43 7/8	(111.4)	48 3/16	(122.4)	53	(134.6)	55 3/8	(140.7)	62 3/8	(158.4)	62 3/8	(158.4)
	Cabinet Width - in (cm)		26	(66)	29 7/8	(75.9)	29 7/8	(75.9)	34 3/8	(87.3)	41 1/2	(105.4)	41 1/2	(105.4)
	Cabinet Depth - in (cm)		28	(71.1)	28 1/4	(71.8)	38 1/8	(96.8)	38 7/8	(98.7)	42 1/4	(107.3)	48 1/4	(122.6)
	Door Opening - in (cm)		12 1/4	(31.1)	15 1/4	(38.7)	15 1/4	(38.7)	19 1/4	(48.9)	19 1/4	(48.9)	19 1/4	(48.9)
	Floor to Door Bottom - in (cm)		14 7/8	(37.8)	16 1/4	(41.3)	16 1/4	(41.3)	16	(40.6)	19 5/16	(49.1)	19 5/16	(49.1)
	Cylinder Diameter - in (cm)		21	(53.3)	25	(63.5)	25	(63.5)	30	(76.2)	37	(94)	37	(94)
	Cylinder Depth - in (cm)		13 1/2	(34.3)	13 3/8	(34)	21 1/8	(53.7)	22	(55.9)	22	(55.9)	28	(71.1)
Weight	Net Weight - lbs (kg)		383	(173.7)	526	(238.6)	744	(337.5)	1000	(453.6)	1322	(599.6)	1415	(641.8)
Shipping	Shipping Weight - lbs (kg)		407	(184.6)	544	(246.8)	766	(347.5)	1016	(460.8)	1364	(618.7)	1460	(662.2)
	Shipping Height - in (cm)		49 1/4	(125.1)	53 1/4	(135.3)	58 3/4	(149.2)	61 1/2	(156.2)	69 1/4	(175.9)	69 1/4	(175.9)
	Shipping Width - in (cm)		28 1/4	(71.8)	31 1/2	(80)	31 1/2	(80)	36	(91.4)	43 1/8	(109.5)	43 1/8	(109.5)
	Shipping Depth - in (cm)		33 1/2	(85.1)	33 1/2	(85.1)	43 3/4	(111.1)	45 1/4	(114.9)	48	(121.9)	54	(137.2)
Water	Water Inlet Size - in (mm)		3/4	(19)	3/4	(19)	3/4	(19)	3/4	(19)	3/4	(19)	3/4	(19)
	Pressure (min/max) - psi (kPa)		30-120	(207-827)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)
	Flow Rate Per Valve Per Min - G/(L)		9	(34)	9	(34)	9	(34)	9 & 12	(34 & 45)	9 & 12	(34 & 45)	9 & 12	(34 & 45)
	Approx. Water Usage - gal (L)		15.8	(59.8)	22.2	(84)	35.1	(132.9)	52.6	(199.1)	80.1	(303.2)	95.6	(361.9)
	Drain Diameter (O.D.) - in (cm)		2 1/4	(5.7)	3	(7.6)	3	(7.6)	3	(7.6)	3	(7.6)	3	(7.6)
	Floor to Center of Drain - in (cm)		6	(15.2)	5	(12.7)	6 7/8	(17.5)	6 5/8	(16.8)	8 5/16	(21.1)	8 5/16	(21.1)
Electrical	Model	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size											
	-12	208-240 / 60 / 1 / 2 wire + ground	15 / 6.2 / #12	15 / 6.2 / #12	15 / 6.2 / #12	20 / 12 / #12	30 / 15 / #10	30 / 16.6 / #10						
		208-240 / 60 / 3 / 3 wire + ground												
-39	230 / 50 / 1 / 2 wire + ground	15 / 6.2 / 3.5 mm²	15 / 6.2 / 3.5 mm²	15 / 6.2 / 3.5 mm²	20 / 12 / 3.5 mm²	30 / 15 / 5.3 mm²	30 / 16.6 / 5.3 mm²							
Installation	Min. Between Machines - in (cm)		1/2	(1.3)	1/2	(1.3)	1/2	(1.3)	1/2	(1.3)	1/2	(1.3)	1/2	(1.3)
	Min. Behind Machines - in (cm)		24	(61)	24	(61)	24	(61)	24	(61)	24	(61)	24	(61)
	Min. Concrete Thickness - in (cm)		6	(15.2)	6	(15.2)	8	(20.3)	8	(20.3)	12	(30.5)	12	(30.5)

EXPRESS X-SERIES STACK DRYER SPECIFICATIONS

T-30x2				T-50x2	
Control	Network Enabled	C-Series X-Series		C-Series X-Series	
Capacity	Dry Weight Capacity - lb (kg)	2 x 30	(2 x 13.6)	2 x 50	(2 x 22.7)
	Cylinder Volume (per tumbler) - cu ft (L)	11.3	(320)	15.8	(447.4)
Speed	Tumbler Speed - RPM	47	---	45	---
	Motor Size (per tumbler) - Standard - hp (kW)	0.5	(0.38)	0.75	(0.56)
	Motor Size (per tumbler) - Reversing - hp (kW)	---	---	2 & 0.5	(1.5 & 0.38)
Airflow	60 Hz Model (per tumbler) - cfm (M3/min)	600	(17)	650	(18.4)
	50 Hz Model (per tumbler) - cfm (M3/min)	500	(14.2)	510	(14.4)
Dimensions	Cabinet Height - in (cm)	76 1/4	(193.7)	79 1/4	(201.3)
	Cabinet Width - in (cm)	31 1/2	(80)	34 1/2	(87.6)
	Cabinet Depth - in (cm)	49 1/2	(125.7)	54 3/4	(139.1)
	Door Opening - in (cm)	22 5/8	(57.5)	25 5/8	(65.1)
	Floor to Lower Door Bottom - in (cm)	7 5/8	(19.4)	7	(17.8)
	Floor to Upper Door Bottom - in (cm)	45 1/4	(114.9)	46	(116.8)
	Cylinder Diameter - in (cm)	30	(76.2)	32 1/2	(82.6)
	Cylinder Depth - in (cm)	27 1/2	(69.9)	33	(83.8)
	Lint Screen Area (per tumbler) - sq in (sq cm)	453	(2923)	544	(3510)
Weight	Net Weight - lbs (kg)	719	(326.1)	871	(395.1)
Shipping	Shipping Weight - lbs (kg)	765	(347)	922	(418.2)
	Shipping Height - in (cm)	81 1/4	(206.4)	84 1/4	(214)
	Shipping Width - in (cm)	33	(83.8)	36	(91.4)
	Shipping Depth - in (cm)	53 3/4	(136.5)	61 1/2	(156.2)
Gas (Gas Models Only)	Gas Supply Connection - in (mm)	1/2	(12.7)	1/2	(12.7)
	Natural Gas Supply (Water Column) - in (cm)	5-8	(12.7 - 20.3)	5-8	(12.7-20.3)
	LP Gas Supply (Water Column) - in (cm)	11 1/2-13 1/2	(29.2 - 34.3)	11 1/2-13 1/2	(29.2-34.3)
	Gas Usage - 60Hz Model (per tumbler) - BTU/hr (kW)	90,000	(26.4)	108,000	(31.7)
	Gas Usage - 50Hz Model (per tumbler) - BTU/hr (kW)	74,000	(21.7)	96,500	(28.3)
Electrical	Gas Models (per stack dryer)	Volts / Hz / Phase / Wiring			
	-11	208-240 / 60 / 1 / 2 wire + ground		15 / 10 / #12 / Reversing	20 / 15 / #12 / Reversing
	-15	208-240 / 60 / 1 / 2 wire + ground			20 / 10 / #12 / Non-Reversing
			120 / 60 / 1 / 2 wire + ground		20 / 8 / #12 / Non-Reversing
	-39	230 / 50 / 1 / 2 wire + ground		15 / 10 / 3.5 mm² / Rev & Non-Rev	
Installation	Min. Clearance Between Machines - in (cm)	0	(0)	0	(0)
	Min. Clearance Behind Machines - in (cm)	18	(45.7)	18	(45.7)
	Make-Up Air Required (per stack dryer) - sq ft (sq cm)	1.5	(1394)	1.5	(1394)
	Exhaust Size - in (cm)	8	(20.3)	8	(20.3)
	Max. Exhaust Back Pressure (Water Column) - in (mm)	0.3	(7.6)	0.3	(7.6)
	Recommended Exhaust Length - ft (m) & 2 elbows	14	(4.3)	14	(4.3)

Control	T-30		T-50	
	Network Enabled	C-Series X-Series	C-Series X-Series	
Capacity	Dry Weight Capacity - lb (kg)	30 (13.6)	50 (22.7)	
	Cylinder Volume - cu ft (L)	11.3 (320)	15.8 (447.4)	
Speed	Tumbler Speed - RPM	47 ---	45 ---	
	Motor Size - 60 Hz Model - hp (kW)	0.5 (0.38)	1 (0.75)	
	Motor Size - 50 Hz Model - hp (kW)	0.5 (0.38)	0.75 (0.56)	
Airflow	60 Hz Model - cfm (M3/min)	830 (23.5)	910 (25.8)	
	50 Hz Model - cfm (M3/min)	690 (19.5)	760 (21.5)	
Dimensions	Cabinet Height - in (cm)	72 1/4 (183.5)	72 1/4 (183.5)	
	Cabinet Width - in (cm)	31 1/2 (80)	34 1/2 (87.6)	
	Cabinet Depth - in (cm)	41 3/4 (106)	48 (121.9)	
	Door Opening - in (cm)	22 5/8 (57.5)	25 5/8 (65.1)	
	Floor to Door Bottom - in (cm)	28 3/4 (73)	27 1/4 (69.2)	
	Cylinder Diameter - in (cm)	30 (76.2)	32 1/2 (82.6)	
	Cylinder Depth - in (cm)	27 1/2 (69.9)	33 (83.8)	
	Lint Screen Area - sq in (sq cm)	515 (3323)	708 (4568)	
Weight	Net Weight - lbs (kg)	454 (205.9)	540 (244.9)	
Shipping	Shipping Weight - lbs (kg)	499 (226.3)	590 (267.6)	
	Shipping Height - in (cm)	77 1/4 (196.2)	77 1/4 (196.2)	
	Shipping Width - in (cm)	32 3/4 (83.2)	36 (91.4)	
	Shipping Depth - in (cm)	45 1/2 (115.6)	51 1/2 (130.8)	
Gas (Gas Models Only)	Gas Supply Connection - in (mm)	1/2 (12.7)	1/2 (12.7)	
	Natural Gas Supply (Water Column) - in (cm)	5-8 (12.7-20.3)	5-8 (12.7-20.3)	
	LP Gas Supply (Water Column) - in (cm)	11 1/2-13 1/2 (29.2-34.3)	11 1/2-13 1/2 (29.2-34.3)	
	Gas Usage - 60Hz Model - BTU/hr (kW)	90,000 (26.4)	145,000 (42.5)	
	Gas Usage - 50Hz Model - BTU/hr (kW)	74,000 (21.7)	120,000 (35.2)	
Electrical	Gas Models	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability	
	-10	120 / 60 / 1 / 2 wire + ground	---	---
	-15	208-240 / 60 / 1 / 2 wire + ground	15 / 5.1 / #12 / Non-Reversing	15 / 5.1 / #12 / Non-Reversing
		120 / 60 / 1 / 2 wire + ground	15 / 9.6 / #12 / Non-Reversing	15 / 9.6 / #12 / Non-Reversing
	-39	230 / 50 / 1 / 2 wire + ground	10 / 5.1 / 2.1 mm² / Non-Reversing	10 / 5.1 / 2.1 mm² / Non-Reversing
Installation	Minimum Behind Machines - in (cm)	0 (0)	0 (0)	
	Minimum Behind Machines - in (cm)	18 (45.7)	18 (45.7)	
	Make-Up Air Required - sq ft (sq cm)	1 (929)	1.25 (1161)	
	Exhaust Size - in (cm)	8 (20.3)	8 (20.3)	
	Max. Exhaust Back Pressure (Water Column) - in (mm)	0.3 (7.6)	0.3 (7.6)	
	Recommended Exhaust Length - ft (m) & 2 elbows	14 (4.3)	14 (4.3)	

Control	T-80		T-120	
	Network Enabled	C-Series X-Series	C-Series X-Series	
Capacity	Dry Weight Capacity - lb (kg)	80 (36.3)	120 (54.4)	
	Cylinder Volume - cu ft (L)	23 (651.3)	36.1 (1022.2)	
Speed	Tumbler Speed - RPM	40 ---	36.5 ---	
	Motor Size - Non-Reversing - 60 Hz : 50 Hz - hp (kW)	1 : 0.75 (0.75 : 0.56)	--- ---	
	Motor Size - Reversing - 60 Hz : 50 Hz - hp (kW)	1 & 0.75 : --- (0.75 & 0.56 : ---)	1 & 1 : 1 & 0.75 (0.75 & 0.75 : 0.75 & 0.56)	
Airflow	Airflow 8” Outlet - 60 Hz : 50 Hz - cfm (M3/min)	1200 : 1000 (34 : 28.3)	--- ---	
	Airflow 10” Outlet - 60 Hz & 50 Hz - cfm (M3/min)	--- ---	1250 : 1000 (35.4 : 28.3)	
	Airflow 12” Outlet - 60 Hz & 50 Hz - cfm (M3/min)	--- ---	1450 : 1000 (41.1 : 28.3)	
Dimensions & Weight	Cabinet Height - in (cm)	75 3/4 (192.4)	85 5/16 (216.7)	
	Cabinet Width - in (cm)	38 1/2 (97.8)	46 3/4 (188.7)	
	Cabinet Depth - in (cm)	51 3/4 (131.4)	60 3/16 (152.9)	
	Door Opening - in (cm)	25 5/8 (65.1)	30 (76.2)	
	Floor to Door Bottom - in (cm)	29 1/4 (74.3)	34 (86.4)	
	Cylinder Diameter - in (cm)	36 1/2 (92.7)	43 (109.2)	
	Cylinder Depth - in (cm)	38 (96.5)	43 (109.2)	
	Lint Screen Area - sq in (sq cm)	823 (5310)	862 (5561)	
Weight	Net Weight - lbs (kg)	715 (324.3)	1075 (487.6)	
Shipping	Shipping Weight - lb (kg)	770 (349.3)	1122 (508.9)	
	Shipping Height - in (cm)	80 3/4 (205.1)	88 3/8 (224.5)	
	Shipping Width - in (cm)	40 1/4 (102.2)	48 1/4 (122.6)	
	Shipping Depth - in (cm)	55 1/2 (141)	68 1/2 (174)	
Gas	Gas Supply Connection - in (mm)	3/4 (19.1)	3/4 (19.1)	
	Natural Gas Supply (Water Column) - in (cm)	5-8 (12.7-20.3)	5-8 (12.7-20.3)	
	LP Gas Supply (Water Column) - in (cm)	11 1/2-13 1/2 (29.2-34.3)	11 1/2-13 1/2 (29.2-34.3)	
	Gas Usage - 60Hz : 50 Hz - BTU/hr (kW)	215,000 : 195,000 (63 : 57.1)	320,000 : 300,000 (93.8 : 87.9)	
Electrical	Gas Models	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability	
	-10	120 / 60 / 1 / 2 wire + ground	15 / 10.4 / #12 / Reversing	25 / 15 / #12 / Reversing
	-15	208-240 / 60 / 1 / 2 wire + ground	15 / 5.5 / #12 / Non-Reversing	---
		120 / 60 / 1 / 2 wire + ground	15 / 10.4 / #12 / Non-Reversing	---
	-39	230 / 50 / 1 / 2 wire + ground	10 / 5.2 / 2.1 mm² / Rev & Non-Rev	20 / 10 / 3.5 mm² / Reversing
Installation	Minimum Between Machines - in (cm)	0 (0)	0 (0)	
	Minimum Behind Machines - in (cm)	18 (45.7)	18 (45.7)	
	Make-Up Air Required - sq ft (sq cm)	1.5 (1394)	2.25 (2090)	
	Exhaust Size - in (cm)	8 (20.3)	10 or 12 (25.4 or 30.5)	
	Max. Exhaust Back Pressure (Water Column) - in (mm)	0.3 (7.6)	0.3 (7.6)	
	Recommended Exhaust Length - ft (m) & 2 elbows	14 (4.3)	14 (4.3)	


SERIES

EXPRESS



**DEXTER.
LAUNDRY**



6 x 

MADE IN THE
USA

T-950



**DEXTER.
LAUNDRY**

Part # 0995-115-019
Rev - 09/01/2024

DEXTER.COM EMPLOYEE OWNED | MADE IN THE USA | SINCE 1894 **1.800.524.2954**